


CIRCOFLUX DS sensor system Ro 130



High-precision testing of ferromagnetic steel bars for longitudinal crack-like defects

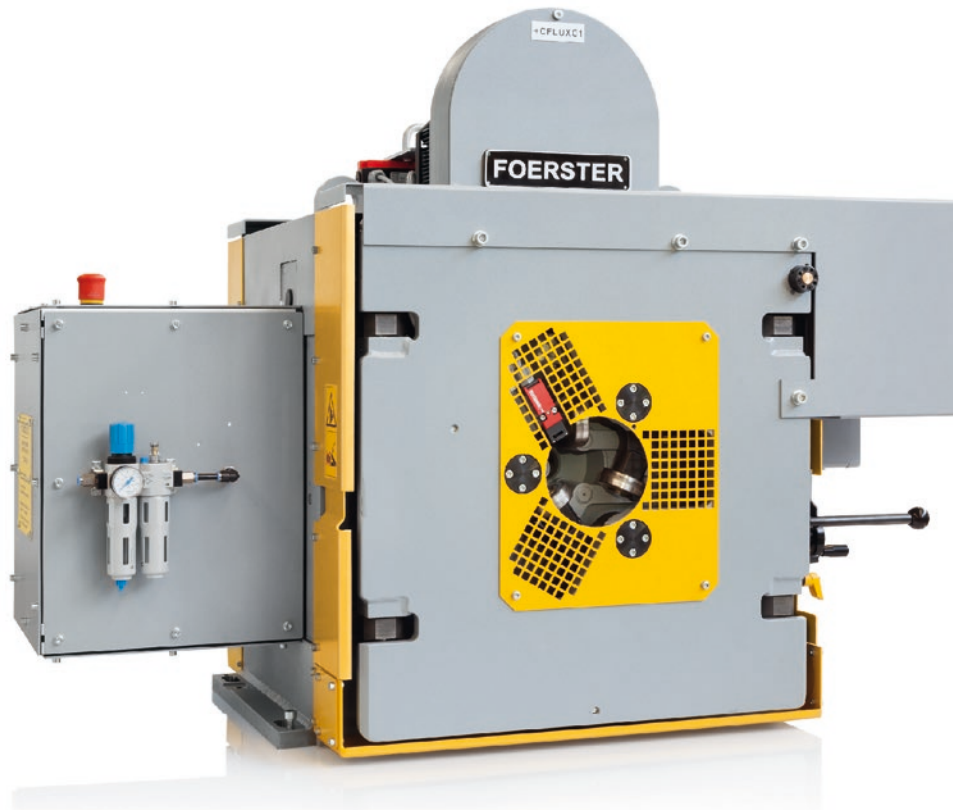

Reliable and effective testing of steel bars for surface defects

Using the highly effective magnetic flux leakage method in accordance with the EN ISO 9443 standard, the CIRCOFLUX testing system non-destructively tests the surface of hot-rolled ferromagnetic steel bars for longitudinal crack-like defects. This test system replaces subjective test methods such as magnetic particle testing (fluxing) or visual inspection, which are not only far less sensitive but also difficult to document and reproduce.

The Ro 130 sensor system can test bars of a diameter ranging from 15 mm to 130 mm. FOERSTER's many years of experience in this field guarantee outstanding operational reliability, and the test electronics' modular design ensures that you'll always be able to accommodate tomorrow's ever-increasing requirements for detection sensitivity.

The benefits

- **Highest detection sensitivity for longitudinal defects:** Starting at 0.1 mm deep on ferromagnetic bars with a hot-rolled surface.
- **Highest resolution and reproducibility:** Up to 24 test channels with a maximum transport speed of 4 m/s.
- **Effective protection against damage:** Swivel-mounted test levers to tolerate uneven materials.
- **Minimal risk of using incorrect settings:** The test diameter is centrally adjusted.
- **Automatic dimension adjustment:** Reduces the changeover time to just 1.5 minutes.
- **Fewer wear parts = reduced costs:** Maintenance-free, inductive signal transmission and magnetization supply.
- **Complete bar inspection:** When used in combination with the FOERSTER BARPROOF ultrasonic test system, you can simultaneously inspect for internal defects.



Comprehensive bar testing with CIRCOFLUX DS and BARPROOF 140

For testing bars with bright or hot-rolled surfaces, several test instruments are typically combined into one test line. This usually starts with a device for detecting surface and near-surface defects, such as the CIRCOFLUX flux leakage system.

This is followed by the BARPROOF 140 for ultrasonic testing for internal defects. For fully automated test-

ing, the FOERSTER test line guides the bars centrally through the individual instruments. And there's no need to stop the test line to maintain or make adjustments to the instruments: they can be moved into a service position for this purpose.

FOERSTER is your one-stop shop for complete bar testing lines. We work with you to develop your customized bar test line and offer you comprehensive services, a single trusted source.

Headquarters

■ Institut Dr. Foerster GmbH & Co. KG, Germany

Subsidiaries

- FOERSTER Tecom, s.r.o., Czechia
- FOERSTER France SAS, France
- FOERSTER Italia S.r.l., Italy
- FOERSTER U.K. Limited, United Kingdom
- FOERSTER (Shanghai) NDT Instruments Co.,Ltd., China
- FOERSTER Instruments India Pvt. Ltd., India
- FOERSTER Japan Limited, Japan
- NDT Instruments Pte Ltd, Singapore
- FOERSTER Middle East, UAE
- FOERSTER Instruments Inc., USA

The FOERSTER Group is being represented by subsidiaries and representatives in over 60 countries – worldwide.

Institut Dr. Foerster GmbH & Co. KG Business Unit Test Systems

In Laisen 70
72766 Reutlingen
Germany
+49 7121 140 0
info@foerstergroup.com

